

ACCENT D1- MODEL: ELD1

Linear Luminaires

WAC LIGHTING

Responsible Lighting®

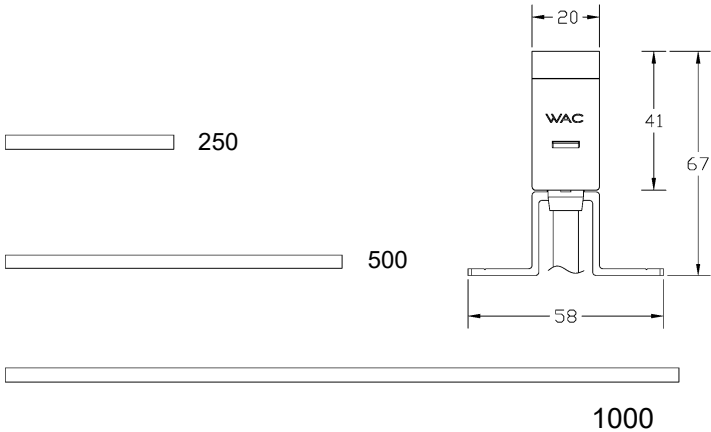
项目名称:

灯位号:

产品图片



线图



产品描述

Accent 系列灯具使用高光效，寿命长的光源，采取等间距排布设计，保证了均匀的出光效果，无阴影。Accent 线性灯具符合 LEED 户外照明功耗设计的要求，整洁轻巧的外观确保轻松装配到外墙。Accent 灯具配备柔性电缆，可自由选择侧面或底部出线，满足项目需求。灯具支持 DMX512 调光控制，带自动编址功能；整灯 IP66 的防护等级，可广泛应用于各种建筑照明等。

产品特性

- 主体材质: 铝合金灯体，PC 端盖
- 光学系统: 三面 PC 扩散罩
- 表面处理: 静电粉末喷涂
- 投射方向: /
- 配件/支架: 铝合金卡片安装
- 安规认证: /
- 防护等级: IP66
- 绝缘等级: Class III
- 环境温度: -20°C~50°C

产品规格

- 光源类型: SMD
- 光源功率: 12W (Max) /1000mm
- 光源光通量: 2700K 1344lm /3000K 1344lm /4000K 1440lm
- 光源寿命: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- 色温/显指: 2700K / 3000K / 4000K , Ra80; RGB
- 光源色容差: 3 SDCM
- 输入电压: 24V DC
- 调光控制: ON-OFF 或 DMX512 调光控制
- 产品重量: 约 0.6Kg, 不含包装

订购模型

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
ELD103-03	250	3(Max)	12	153	ET ON-OFF 24V DC Power Supply	P 三面发光	0 W/O Phase	27 2700K	BK Black
ELD105-06	500	6(Max)	24	305				30 3000K	
ELD110-12	1000	12(Max)	48	610				40 4000K	

示例: ELD110-12ET-P027BK

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting 保留对产品进行不定期设计更新的权利。2022-06-09

ACCENT D1- MODEL: ELD1

Linear Luminaires

WAC LIGHTING

Responsible Lighting®





项目名称:

灯位号:


Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
ELD103-03	250	3(Max)	12	153	MT DMX512 Dimming 24V DC Power Supply	P 三面发光	1 1 Phase 4 4 Phase 8 8 Phase	27 2700K	BK Black
ELD105-06	500	6(Max)	24	305				30 3000K	
ELD110-12	1000	12(Max)	48	610				40 4000K FC RGB	

示例: ELD110-12MT-P127BK

配件

Item	Description	Pic	Description Dimensions	Quantity Suggested
ELD1-PC-CT002F	ET Female connector			1 pc per 8m
ELD1-PC-CT002M	ET Male connector			1 pc per 8m
ELD1-CC-CT002F	MT Female connector			1 pc per 8m
ELD1-CC-CT002M	MT Male connector			1 pc per 8m

配光曲线3000K数据



型 号:	ELD110-12ET-P030BK
光 束 角:	135°
系统 功率:	12.8 W
系统光通量:	307.7 lm
中心 光强:	/
系统 光效:	24 lm /W