

ACCENT D3- MODEL: ELD3

Linear Luminaires

WAC LIGHTING

Responsible Lighting®


项目名称:

灯位号:

产品图片



线图

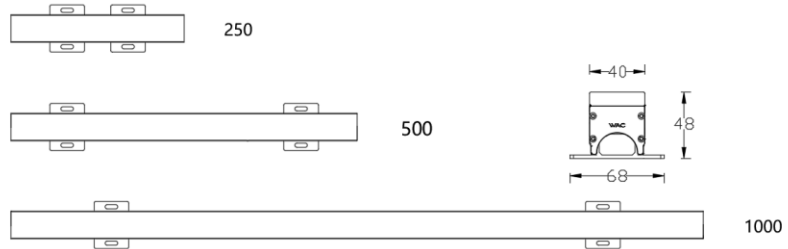

产品描述

Accent D3 灯具使用高光效, 寿命长的光源, 采取等间距排布设计, 保证了均匀的出光效果, 无阴影。Accent D3 线性灯具符合 LEED 户外照明功耗设计的要求, 整洁轻巧的外观确保轻松装配到外墙。Accent D3 灯具配备柔性电缆, 底部出线, 满足项目需求。灯具支持 DMX512 调光控制, 带自动编址功能; 整灯 IP66 的防护等级, 可广泛应用于各种建筑照明等。

产品特性

- 主体材质: 铝合金灯体, PC 端盖
- 光学系统: 三面 PC 扩散罩
- 表面处理: 静电粉末喷涂
- 投射方向: /
- 配件/支架: 铝型材固定支架
- 安规认证: CQC
- 防护等级: IP66
- 绝缘等级: Class III
- 环境温度: -20°C~50°C

产品规格

- 光源类型: SMD
- 光源功率: 20W (Max) /1000mm
- 光源光通量: 2700K 2200lm /3000K 2300lm /4000K 2400lm
- 光源寿命: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- 色温/显指: 2700K / 3000K / 4000K , Ra80; RGBW, 白光可调
- 光源色容差: 3 SDCM (MONO) , 5 SDCM (RGBW)
- 输入电压: 24V/DC
- 调光控制: ON-OFF 或 DMX512 调光控制
- 产品重量: 约 1.56Kg, 不含包装

订购模型

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
ELD303-05	250	5(Max)	18	202	ET ON-OFF 24V DC Power Supply	P 三面发光	0 W/O Phase	27 2700K	BK Black
ELD305-10	500	10(Max)	36	403				30 3000K	
ELD310-20	1000	20(Max)	72	806				40 4000K	

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
ELD303-05	250	5(Max)	18	202	MT DMX512 Dimming 24V DC Power Supply	P 三面发光	1 1 Phase	27 2700K	BK Black
ELD305-10	500	10(Max)	36	403			B 12 Phase	30 3000K	
ELD310-20	1000	20(Max)	72	806			40 4000K		

示例: ELD310-20MT-PB30BK

WAC Lighting

www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd

14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

ACCENT D3- MODEL: ELD3

Linear Luminaires

WAC LIGHTING

Responsible Lighting®









项目名称:

灯位号:


Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	Beam	Phase Controller (m)	CCT	Finish
ELD303-05	250	5(Max)	18	113	MT DMX512 Dimming 24V DC Power Supply	P 三面发光	1 1 Phase B 12 Phase	F3 RGBW W=3000K	BK Black
ELD305-10	500	10(Max)	36	226				F4 RGBW W=4000K	
ELD310-20	1000	20(Max)	72	451				CC TUNNABLE WHITE	

示例: ELD310-20MT-PBF3BK

配件

Item	Description	Pic	Description Dimensions	Quantity Suggested
ELF5-PC-CT002F	ON-OFF Female connector			1 pc per 8m
ELF5-PC-CT002M	ON-OFF Male connector			1 pc per 8m
ELF5-CC-CT002F	DMX512 Dimming Female connector			1 pc per 8m
ELF5-CC-CT002M	DMX512 Dimming Male connector			1 pc per 8m

配光曲线3000K数据

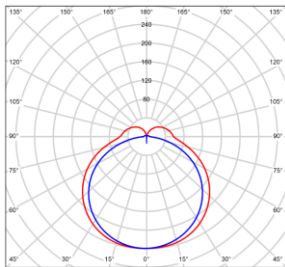

型号:	ELD310-20MT-PBF3BK
光束角:	129°
系统功率:	21.8 W
系统光通量:	451lm
中心光强:	108cd
系统光效:	20.7 lm /W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting 保留对产品进行不定期设计更新的权利。2023-04-28