

# MINI FLOOD III - MODEL: ELF5

## Linear Luminaires

# WAC LIGHTING

Responsible Lighting®


项目名称:

灯位号:

### 产品图片



### 线图

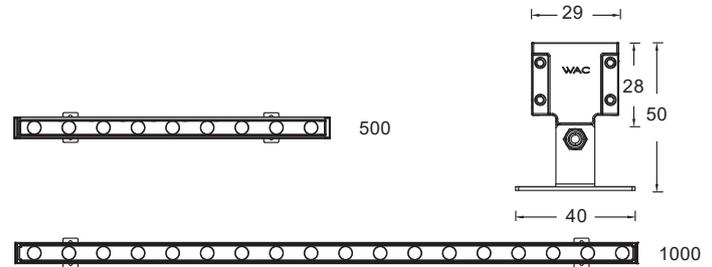

### 产品描述

BEACON系列Mini Flood III 灯具配备光效率高, 寿命长的高质量芯片以及独特光学性能的透镜, 结合等间距排布设计, 保证了均匀的出光。IP66防水等级与DMX512调光控制, Mini Flood III灯具从底部出线, 符合LEED户外照明功耗设计的要求。

### 产品特性

- 主体材质: 铝挤型灯体+PC94V0 端盖
- 光学系统: 透镜
- 表面处理: 静电粉末喷涂
- 投射方向: /
- 配件/支架: 旋转支架, 可调角度+/-90°
- 安规认证: CQC
- 防护等级: IP66
- 绝缘等级: Class III
- 环境温度: -20°C~50°C

### 产品规格

- 光源类型: SMD
- 光源功率: 36W (Max) /1000mm
- 光源光通量: 2700K 3600lm ; 3000K 3840lm ; 4000K 3960lm
- 光源寿命: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- 色温/显指: 2700K / 3000K / 4000K , Ra80
- 光源色容差: 3 SDCM
- 输入电压: 24V DC
- 调光控制: ON-OFF / DMX512 调光控制 / 0-10V 调光控制
- 产品重量: 约 1.4Kg /M, 不含包装

### 订购模型

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
ELF505-09	500	09 (Max)	9	911	ET ON-OFF 24V DC Power Supply	1 15°	27 2700K 30 3000K 40 4000K	BK Black
ELF505-12	500	12 (Max)	12	1167	DT 0-10V Dimming 24V DC Power Supply	2 23° 3 33° 4 41°		
ELF505-18	500	18 (Max)	15	1613	MT DMX512 Dimming 24V DC Power Supply	F 23°X48°		

示例: ELF505-12ET-130BK

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.com.cn (China)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co., Ltd  
14, Lane 299, Bi Sheng Road, Shanghai 201204  
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting 保留对产品进行不定期设计更新的权利。2025-07-02

# MINI FLOOD III - MODEL: ELF5

## Linear Luminaires

# WAC LIGHTING

Responsible Lighting®

项目名称:

灯位号:



Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
ELF510-18	1000	18 (Max)	18	1822	ET ON-OFF 24V DC Power Supply	1 15° 2 23° 3 33° 4 41° F 23°X48°	27 2700K 30 3000K 40 4000K	BK Black
ELF510-24	1000	24 (Max)	24	2334	DT 0-10V Dimming 24V DC Power Supply			
ELF510-36	1000	36 (Max)	30	3226	MT DMX512 Dimming 24V DC Power Supply			

示例: ELF510-18ET-130BK

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
ELF505-12	500	12 (Max)	12	1167	ET ON-OFF 24V DC Power Supply	W Wall Washer	27 2700K 30 3000K 40 4000K	BK Black
ELF510-24	1000	24 (Max)	24	2334	DT 0-10V Dimming 24V DC Power Supply			
					MT DMX512 Dimming 24V DC Power Supply			

示例: ELF510-24ET-W30BK

### 配件

Item	Description	Pic	Mounting	Quantity Suggested
ELF5-CB050-BK	Cover 500mm			
ELF5-CB100-BK	Cover 1000mm			
ELF5-GB18050-BK	Cover 9W 500mm			
ELF5-GB24050-BK	Cover 12W 500mm			
ELF5-GB36050-BK	Cover 18W 500mm			
ELF5-GB18100-BK	Cover 18W 1000mm			
ELF5-GB24100-BK	Cover 24W 1000mm			

# MINI FLOOD III - MODEL: ELF5

Linear Luminaires

# WAC LIGHTING



Responsible Lighting®

项目名称:

灯位号:

ELF5-GB36100-BK	Cover	36W 1000mm		
-----------------	-------	------------	--	--

配件

Item	Description	Pic	Mounting	Quantity Suggested
ELF5-PC-CT002F	ET Female connector			1 pc per 6m
ELF5-PC-CT002M	ET Male connector			1 pc per 6m
ELF5-CC-CT002F	MT Female connector			1 pc per 6m
ELF5-CC-CT002M	MT Male connector			1 pc per 6m

# MINI FLOOD III - MODEL: ELF5

## Linear Luminaires


# WAC LIGHTING

Responsible Lighting®

项目名称:

灯位号:

### 配光曲线@3000K数据

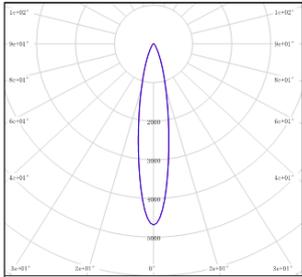

型号: ELF510-18ET-130BK


光束角: 15.3°

系统功率: 18.6W

系统光通量: 1822 lm

中心光强: /

系统光效: 99lm /W

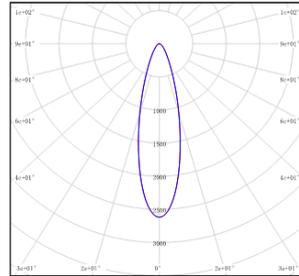

型号: ELF510-18ET-230BK


光束角: 23°

系统功率: 18.6W

系统光通量: 1710 lm

中心光强: /

系统光效: 92 lm /W

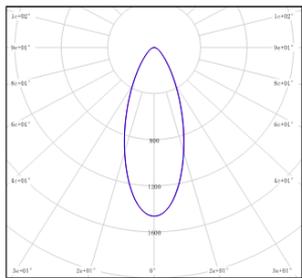

型号: ELF510-18ET-330BK


光束角: 33°

系统功率: 18.6W

系统光通量: 1583 lm

中心光强: /

系统光效: 85.3 lm /W

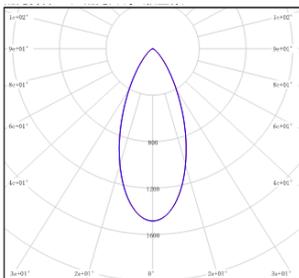

型号: ELF510-18ET-430BK


光束角: 41.3°

系统功率: 18.6W

系统光通量: 1763 lm

中心光强: /

系统光效: 95lm /W

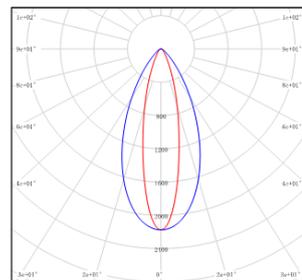

型号: ELF510-18ET-F30BK


光束角: 23°X48°

系统功率: 18.6W

系统光通量: 1593 lm

中心光强: /

系统光效: 86 lm /W

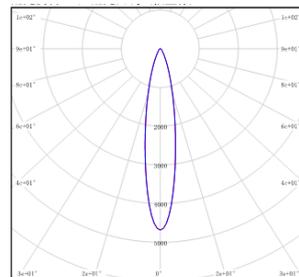

型号: ELF510-24ET-130BK


光束角: 15.3°

系统功率: 25.5W

系统光通量: 2334 lm

中心光强: /

系统光效: 91.5lm /W

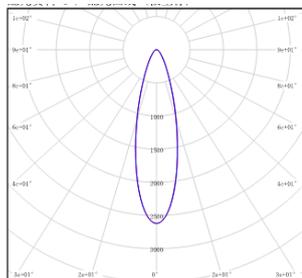

型号: ELF510-24ET-230BK


光束角: 23°

系统功率: 25.5W

系统光通量: 2192 lm

中心光强: /

系统光效: 86 lm /W

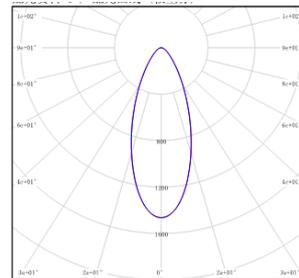

型号: ELF510-24ET-330BK

光束角: 33°

系统功率: 25.5W

系统光通量: 2030 lm

中心光强: /

系统光效: 80 lm /W

# MINI FLOOD III - MODEL: ELF5


Linear Luminaires

# WAC LIGHTING

Responsible Lighting®

项目名称:

灯位号:

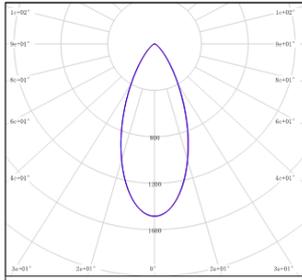

型号: ELF510-24ET-430BK


光束角: 41.3°

系统功率: 25.5W

系统光通量: 2060 lm

中心光强: /

系统光效: 88.6 lm /W

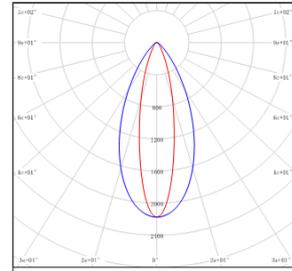

型号: ELF510-24ET-F30BK


光束角: 23°x48°

系统功率: 25.5W

系统光通量: 2042 lm

中心光强: /

系统光效: 80 lm /W

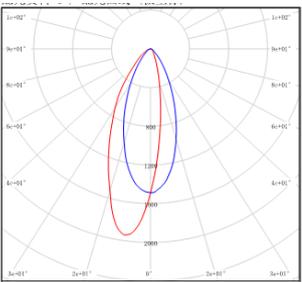

型号: ELF510-24ET-W30BK


光束角: Wall Washer

系统功率: 24.4W

系统光通量: 1988 lm

中心光强: /

系统光效: 81 lm /W

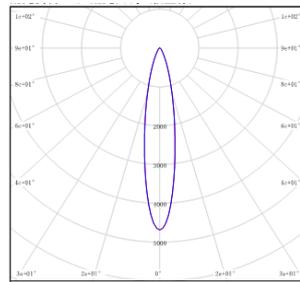

型号: ELF510-36ET-130BK


光束角: 15.3°

系统功率: 36.5W

系统光通量: 3226 lm

中心光强: /

系统光效: 90.5 lm /W

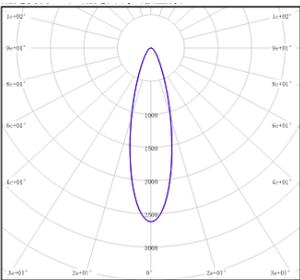

型号: ELF510-36ET-230BK


光束角: 23°

系统功率: 36.5W

系统光通量: 3029 lm

中心光强: /

系统光效: 85 lm /W

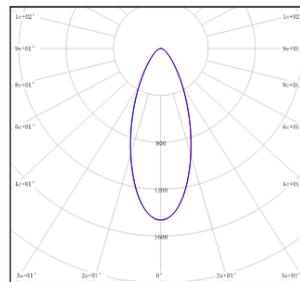

型号: ELF510-36ET-330BK


光束角: 33°

系统功率: 36.5W

系统光通量: 2804 lm

中心光强: /

系统光效: 78.5 lm /W

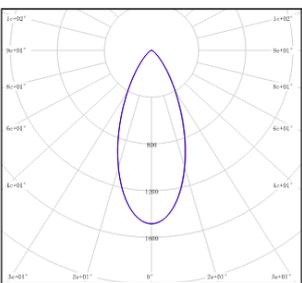

型号: ELF510-36ET-430BK


光束角: 41.3°

系统功率: 36.5W

系统光通量: 3123 lm

中心光强: /

系统光效: 87.5 lm /W

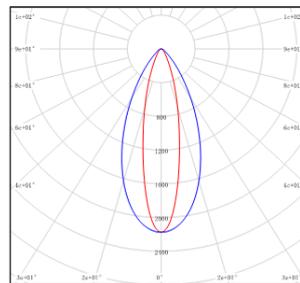

型号: ELF510-36ET-F30BK

光束角: 23°x48°

系统功率: 36.5W

系统光通量: 2821 lm

中心光强: /

系统光效: 80 lm /W