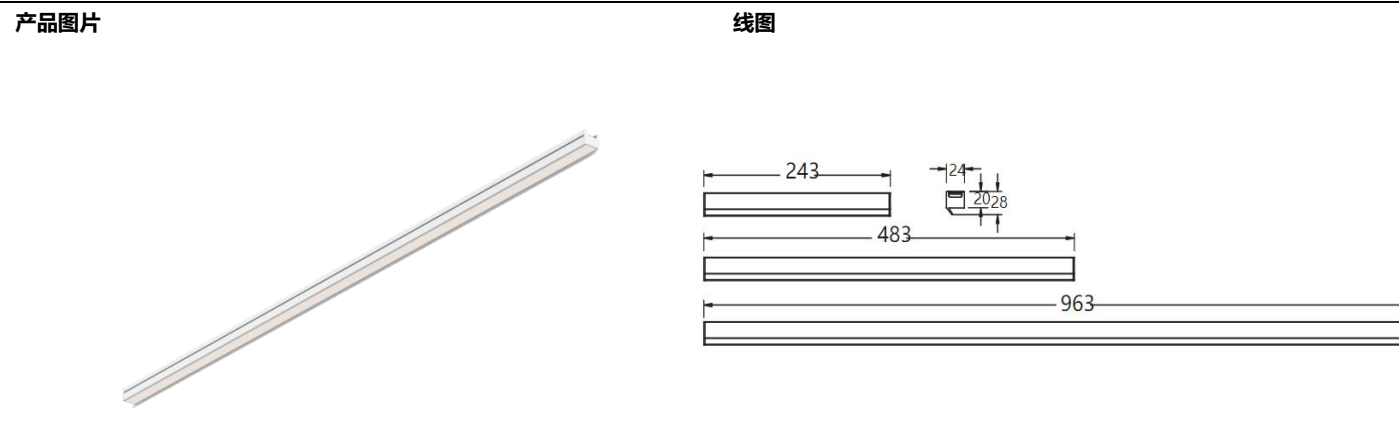


项目名称:

灯位号:



产品描述

LIGNE III 采用特殊透镜或偏光光学系统，配合合理的LED灯珠排列，使光线均匀地洒在墙面上，无暗区或眩光。兼具高效散热、节能低耗与防眩柔光优势。DC24V 输入，可首尾相接。适用于办公空间,展览,酒店及商业公区的暗槽安装式线性洗墙应用。

产品特性	产品规格
• 主体材质: 铝合金挤出灯身 • 光学系统: 透镜 • 表面处理: 静电粉末喷涂 • 投射方向: / • 配件/支架: 详见配件表 • 安规认证: CQC • 防护等级: IP20 • 绝缘等级: Class III • 环境温度: -20℃~40℃	• 遮光角: / • 光源类型: SMD LED • 光源光通量: 1m:5000lm@3000K; 1m:5600lm@4000K • 光源寿命: > 50,000h-L70 /B10-Ta25℃(LM-80/TM-21) • 色温/显指 2700K/3000K/4000K, Ra90 • 光源色容差 3 SDCM • 输入电压: 24V DC • 调光控制: 用户自配调光模块 (必须提前与项目现场系统做匹配测试) • 产品重量: 约0.5Kg/m, 不含包装

订购模型

Model	Diameter (mm)	Power (W)	Driver	Beam	CCT	Finish
OC3N	02 243	05 05W	N No Driver	W Wall Wash	27 2700K	WT White
	05 483	10 10W			30 3000K	BK Black
	10 963	20 20W			40 4000K	

示例: OC3N-1020N-W30WT
备注: 最大串接长度5m。

LIGNE III - MODEL: OC3N

Linear Luminaires




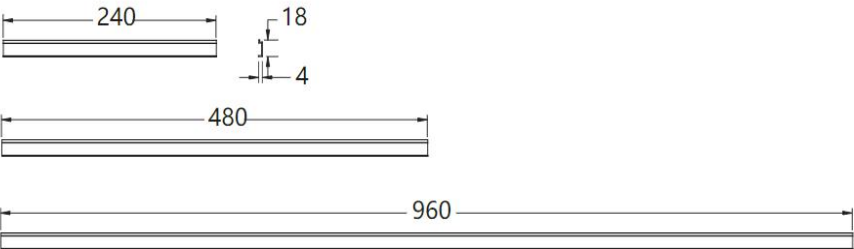
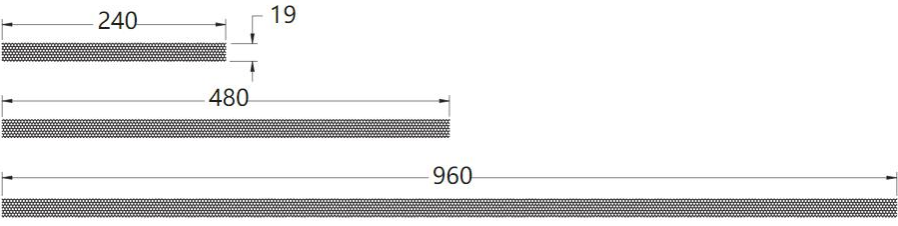
WAC LIGHTING

Responsible Lighting®

项目名称:

灯位号:

配件(单独订购)

型号	规格	尺寸
OC3N-AB001	Adjust Bracket	
OC3N-PC-CT002F	Female connector	
OC3N-PC-CT002M	Male connector	
OC3N-CG100-WT OC3N-CG100-BK	960mm Cover	
OC3N-CG050-WT OC3N-CG050-BK	480mm Cover	
OC3N-CG025-WT OC3N-CG025-BK	240mm Cover	
OC3N-HC100-BK	960mm	
OC3N-HC050-BK	480mm	
OC3N-HC025-BK	240mm	